


Brief Drawing

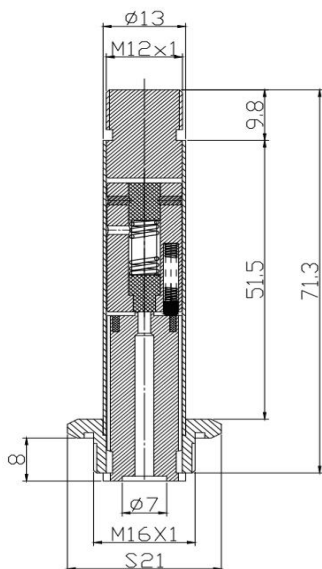

Product Parameters


ALT005-CK							
Tube Assy OD×H	Connection Size /Thread Size	2Way/3Way	NO/NC	Seal Pad Size	AC/DC	Tube Assy Material	Coil For Option
φ9×28.6	M12×0.5	2Way	NO	φ4.2	AC	Stainless Steel	ALTH210

Description

1. Static core and movable plunger are made of materials which has high magnetic permeability,low magnetic residual and excellent anti-corrosion and rust resistance,All of the features make the products durable and responsive.
2. By applying 0.5mm ,SUS304 seamless tube,products have excellent features of durability,anti-corrosion as well as rust resistance.
3. Argon arc welding and silver soldering technology makes seal condition much safer than normal clamp process.
4. Imported stainless steel spring wires makes stable force and good resilience.
5. Seal material is made of excellent NBR,temperature rangs from -30°-100°.



先导头简图

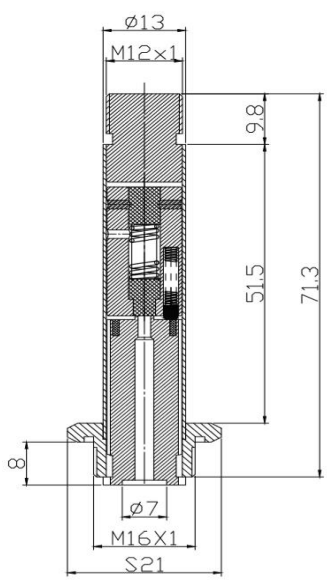

产品参数清单

ALT005-CK							
套管外径×高度	接口尺寸	二通/三通	常闭/常开	密封件尺寸	交流/直流	隔磁管材质	配合线圈型号
Φ13×51.5	M16×1	二通	常开	Φ3.6	交流	不锈钢	/

产品说明

- 1. 静铁芯采用高导磁、低剩磁、防锈、耐腐蚀材料制作，经久耐用、反应灵敏。
- 2. 隔磁管采用管壁厚度 0.5mm 的 H59-1 的铜管制作，防锈、防裂、耐磨、耐腐蚀、隔磁性能好。
- 3. 采用滚压技术，使产品连接更紧密、牢固。
- 4. 弹簧采用进口不锈钢弹簧专用钢丝制作，压力稳定，复原性能良好。
- 5. 密封材料采用耐磨、耐油和抗变形性较佳的 NBR 材料制作，密封件使用温度-30℃ ~ 100℃。